


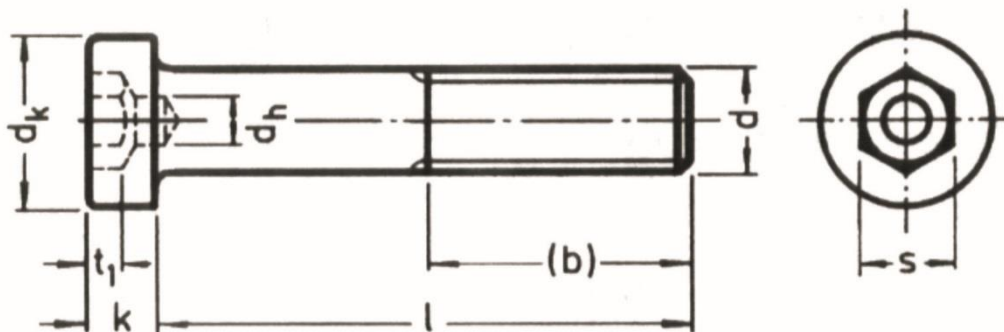


## LAGE CILINDERKOPSCHROEF MET BINNENZESKANT MET TAPGELEIDING

<b>DIN-6912</b>	
	
<b>ELVZ</b>	<b>BZK+TAP</b> 
<b>ST-8.8</b>	
<b>03071</b>	<b>M-</b>

<b>DIN</b>	DIN-6912
<b>EN</b>	-
<b>ISO</b>	ISO-14580
<b>CODE</b>	69120
<b>MATERIAAL</b>	STAAL 8.8
<b>OPPERVLAKTE</b>	ELEKTROLYTISCH VERZINKT
<b>CODE</b>	0881
<b>METRISCH</b>	M-
<b>VOORBEELD</b>	M-4X16
<b>CODE</b>	040016
<b>BESTELCODE</b>	69120 0881 040016



D	B	T1 MIN	S	K MAX	DK MAX
M4	14	1.48	3	2.8	7
M5	16	1.88	4	3.5	8.5
M6	18	2.38	5	4	10
M8	22	2.88	6	5	13
M10	26	3.35	8	6.5	16
M12	30	3.85	10	7.5	18
M14	34	4.35	12	8.5	21
M16	38	5.35	14	10	24
M20	46	6.32	17	12	30
M24	54	6.82	19	14	36
M30	66	8.82	22	17.5	45