




## METAALSCHROEF

MET BOLCILINDERKOP EN PHILLIPSKRUIS

<b>DIN-7985H</b>	
	
<b>A2</b>	<b>PHKR</b>
<b>RVS</b>	
<b>59760</b>	<b>M-</b>

<b>DIN</b>	DIN-7985
<b>EN</b>	-
<b>ISO</b>	ISO-7045
<b>CODE</b>	79851
<b>MATERIAAL</b>	ROESTVAST STAAL A2
<b>OPPERVLAKTE</b>	-
<b>CODE</b>	3200
<b>METRISCH</b>	M-
<b>VOORBEELD M-4X6</b>	
<b>CODE</b>	040006
<b>BESTELCODE</b>	55100 7866 040006

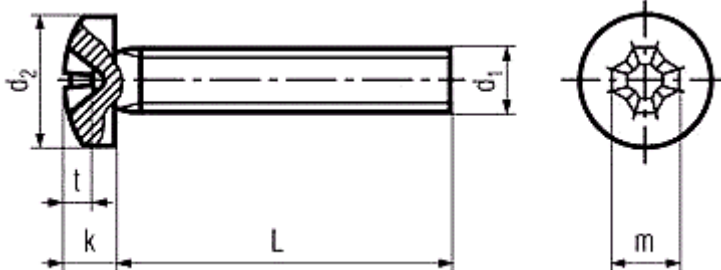

D1	D2 MAX.	K MAX.	PHILLIPS	M APPROX.	T MIN.	T MAX.	PROOF LOAD N
M1.6	3.2	1.42	0	1.8	0.72	1.02	370
M2	4	1.72	1	2.5	1.1	1.4	600
M2.5	5	2.12	1	2.7	1.3	1.6	990
M3	6	2.52	1	3.1	1.7	2	1560
M3.5	7	2.82	2	4.2	1.74	2.24	2100
M4	8	3.25	2	4.6	2.04	2.54	2720
M5	10	3.95	2	5.3	2.77	3.27	4400
M6	12	4.75	3	6.8	3.03	3.53	6230
M8	16	6.15	4	9	4.18	4.68	11400
M10	20	7.68	4	10.2	5.38	5.88	18000